


MULTIMODE FIBER OPTIC CABLE MPO / MTP 24 FIBER OM4 TYPE B


MTP MPO optic fiber connector design allows the use of a flat die and optical cable which enables a very high density translates directly into cost savings due to reduced hardware requirements and actual optical space telecommunications nodes and datacenters.

CHARACTERISTICS:

Fiber type:	OM4
Fibres:	24
Polarity:	Type B
Polish:	PC
Typical insertion loss (IL):	$\leq 0,25$ dB
Maximum insertion loss (IL):	$\leq 0,50$ dB
Return loss (RL):	≥ 40 dB
Operating temperature:	-40 to 80°C
Durability:	500 cycles
Approvals:	EC61754-7, TIA/EIA 604-5
Length:	Custom cable length can be quoted.

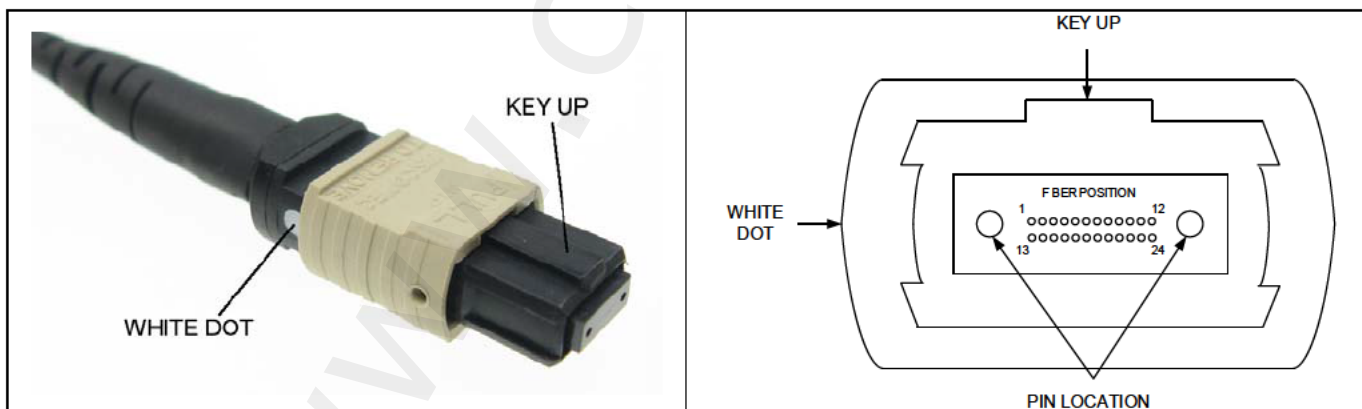

MULTIMODE FIBER OPTIC CABLE MPO / MTP 24 FIBER OM4 TYPE B

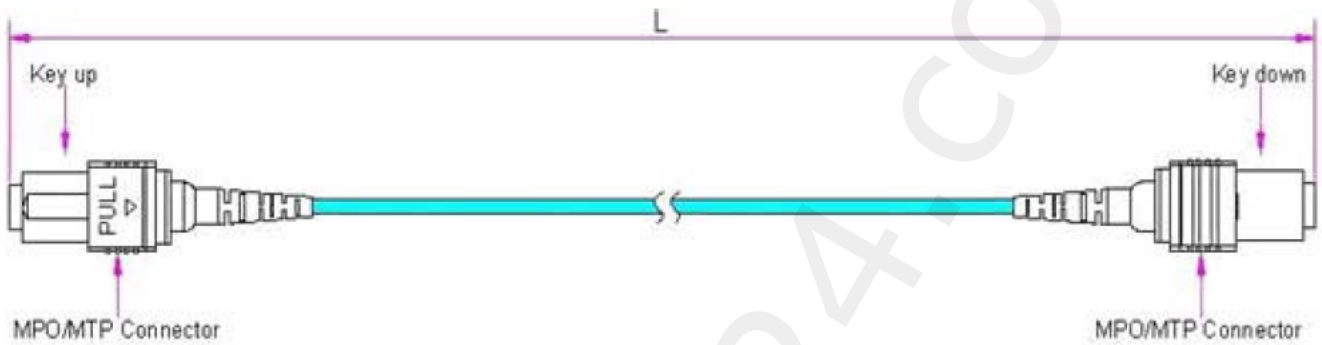

TYPE B POLARITY

SIDE 1	SIDE 2	SIDE 1	SIDE 2
FIBER	FIBER	FIBER	FIBER
1	12	13	24
2	11	14	23
3	10	15	22
4	9	16	21
5	8	17	20
6	7	18	19
7	6	19	18
8	5	20	17
9	4	21	16
10	3	22	15
11	2	23	14
12	1	24	13

Fully inspected and tested by a qualified technician. Test results bagged and shipped with product.

